
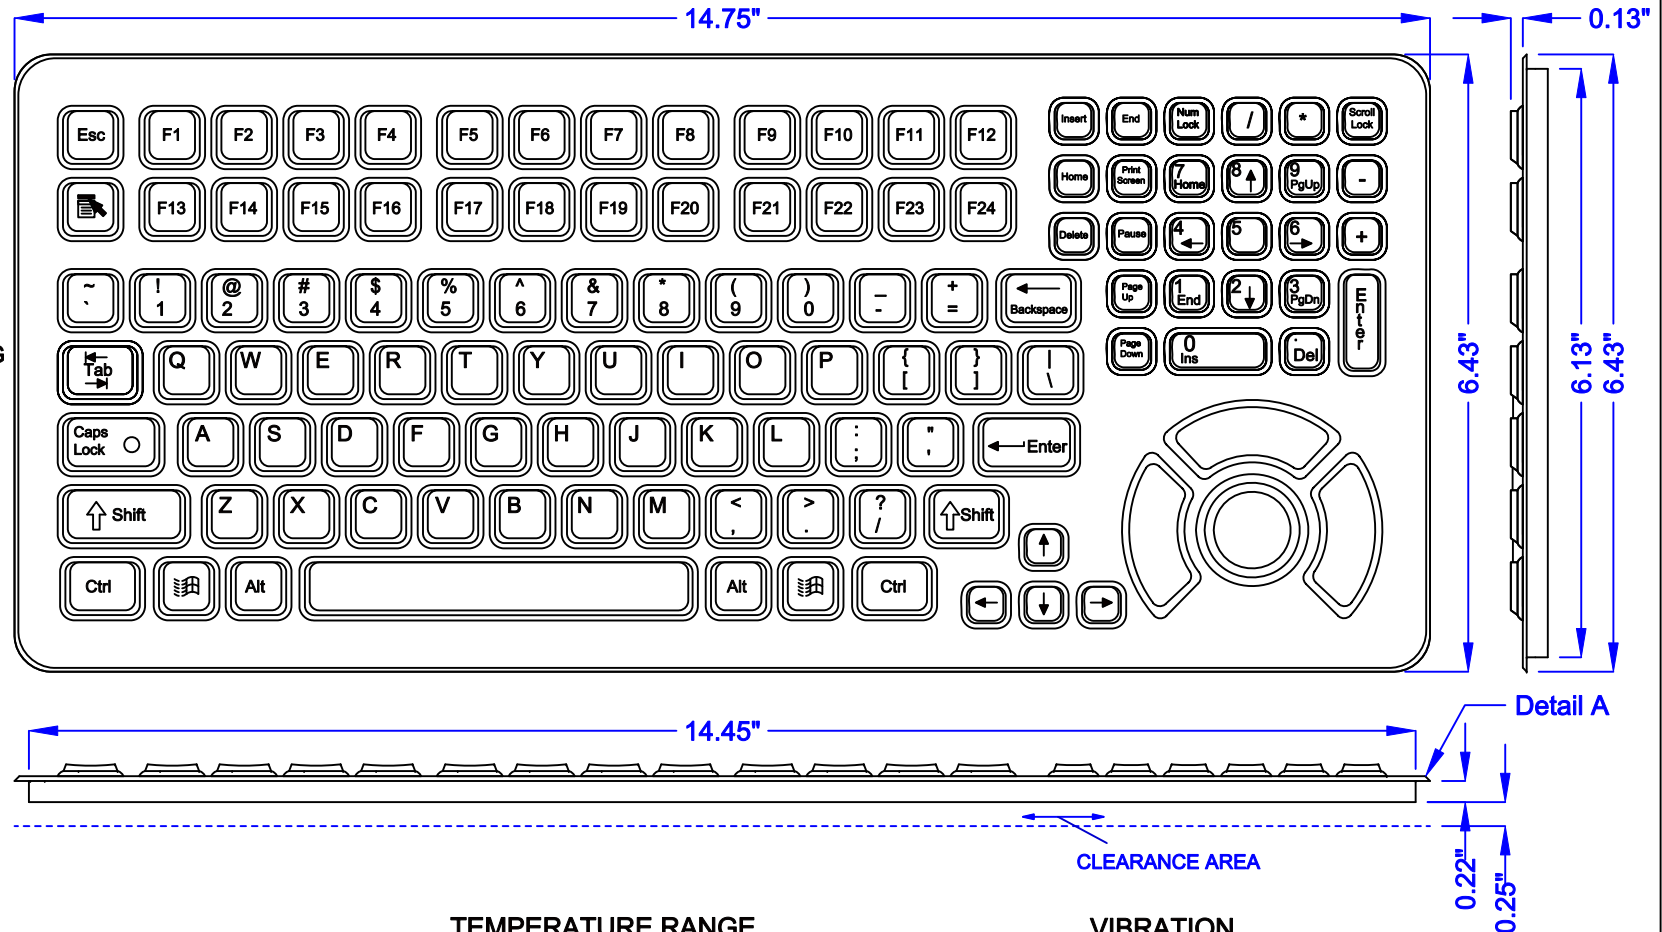


# DU-5K-OEM

DATE	CHANGES	INTL	REV
08.05.08	Original	JB	1.00

## NOTES:

1. UNIT IS MOUNTED USING RTV ADHESIVE AND #6-32 x 1/4" MOUNTING SCREWS (20 PLACES)
2. TALLEST COMPONENT EXTENDS 0.250" BELOW KEYPAD



## KEY SWITCH

MATERIAL: Industrial Silicone Rubber  
 LIFE: Greater Than 10 Million Cycles  
 TRAVEL: 0.055 in.  
 ACTUATION FORCE: 6.35 oz. +/- 1.06oz (180g +/- 30g)  
 FEEDBACK: Tactile with Mechanical Snap

## TEMPERATURE RANGE

STORAGE: -40°F to +158°F (-40°C to +70°C)  
 OPERATING: -4°F to +140°F (-20°C to +60°C)

## VIBRATION

POWER SPECTRAL DENSITY: .04g/HZ  
 FREQUENCY RANGE: 20Hz-2Khz  
 DURATION OF TEST PER AXIS: 3 hours

## POWER

PS2: KEYBOARD: 50mA@5V (from Keyboard port)  
 POINTER: 35mA@5V (from Mouse port)  
 USB: 85mA@5V (from CPU port)

## HUMIDITY

100% Humidity Resistant

## SHOCK

3 X 11 ms pulses of 50g on each of 3 axis

## WEIGHT

1.50 lbs +/- 0.10 lbs (0.68 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2



iKey, Ltd.  
 2621 Ridgpoint Dr. Suite 235  
 Austin, Texas 78754

Voice: (512) 837-0283  
 Fax: (512) 927-8830

©2008 iKey, Ltd.

Part Number: DU-5K-OEM

Drawing Title: DU-5K-OEM

Drawing Number: MKT0134


Revision: 1.00

Sheet: 1 OF 2

Date: 08.05.08

JWB

# DU-5K-OEM MOUNTING

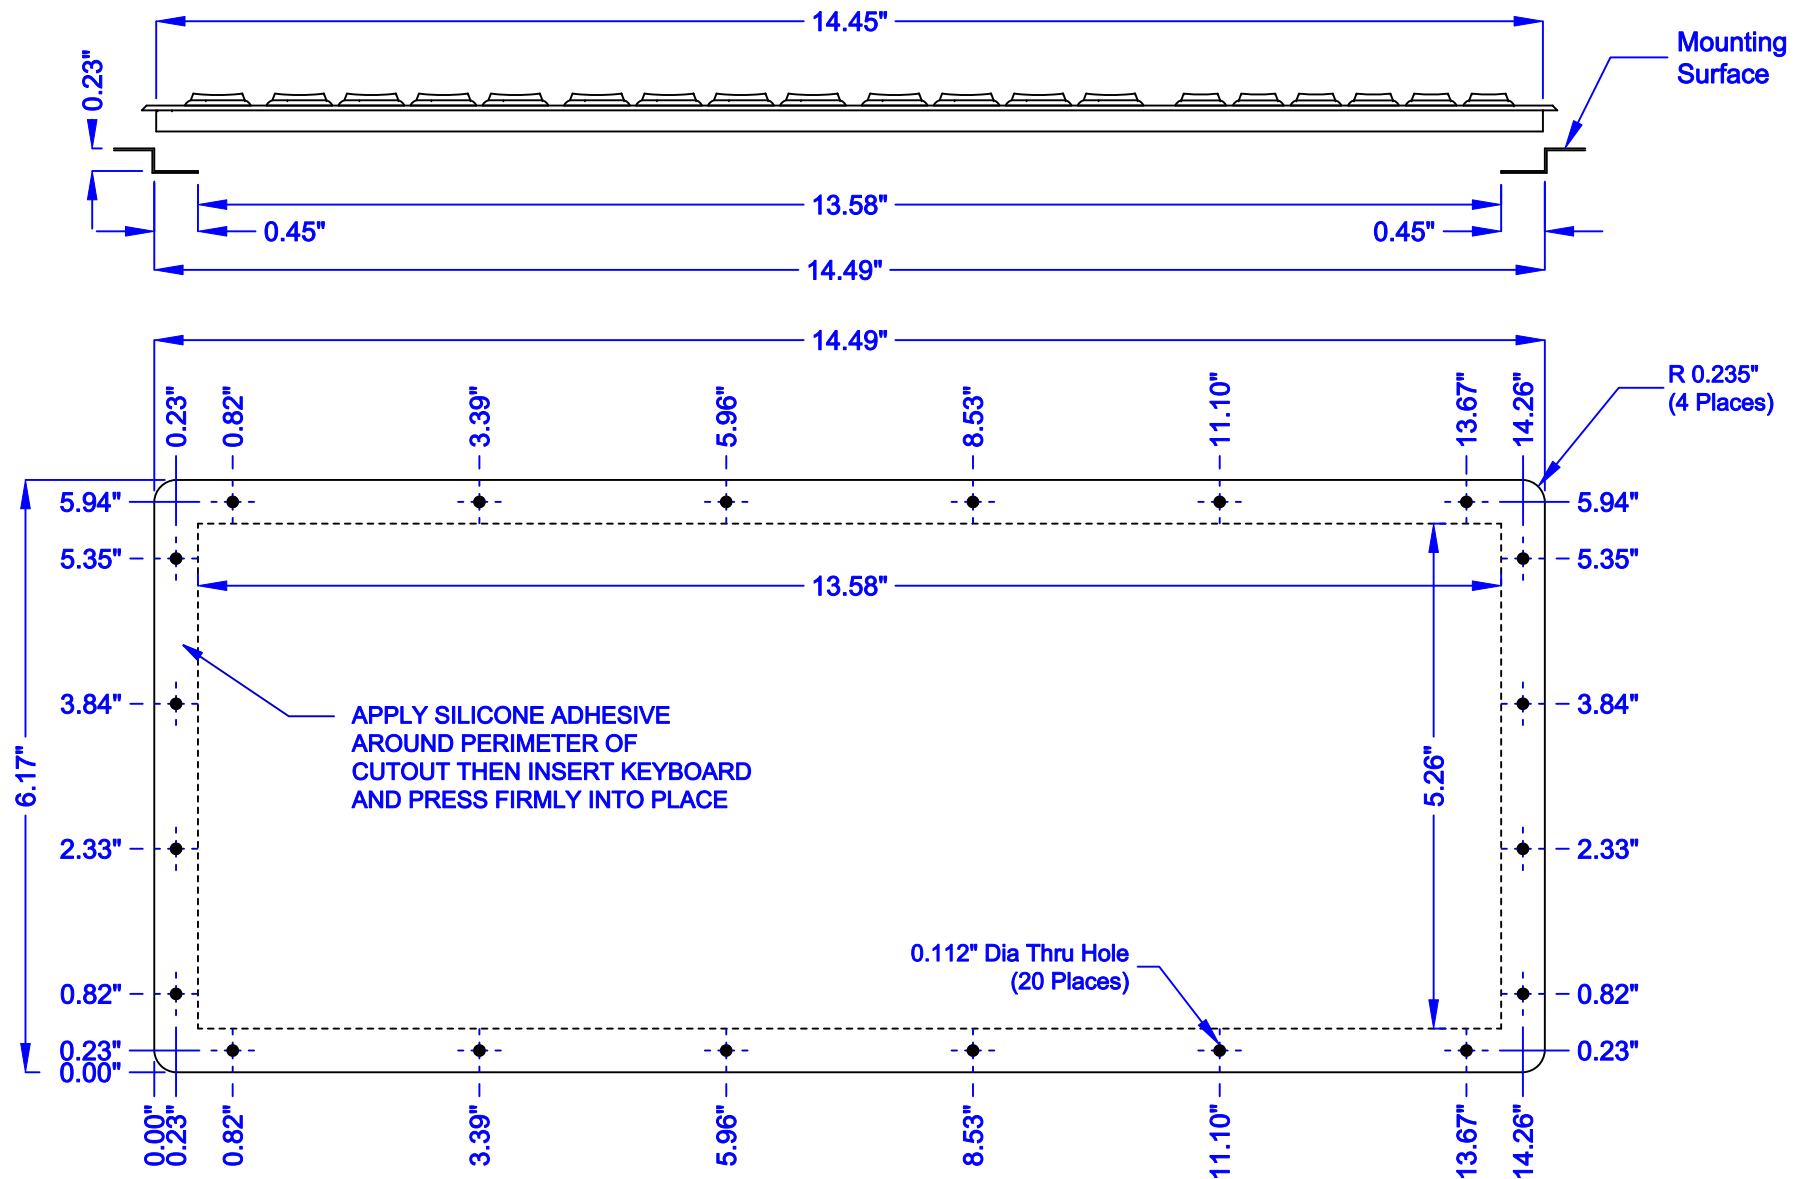

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2



iKey, Ltd.  
2621 Ridgpoint Dr. Suite 235  
Austin, Texas 78754

©2006 iKey, Ltd.  
Voice: (512) 837-0283  
Fax: (512) 927-8530

Part Number: DU-5K-OEM

Drawing Title: DU-5K-OEM

Drawing Number: MKT0134

Revision: 1.00

Sheet: 2 OF 2

Date: 08.05.08

JWB