


HP-1330

DATE	CHANGES	INTL	REV
09.09.08	Original	JB	1.00

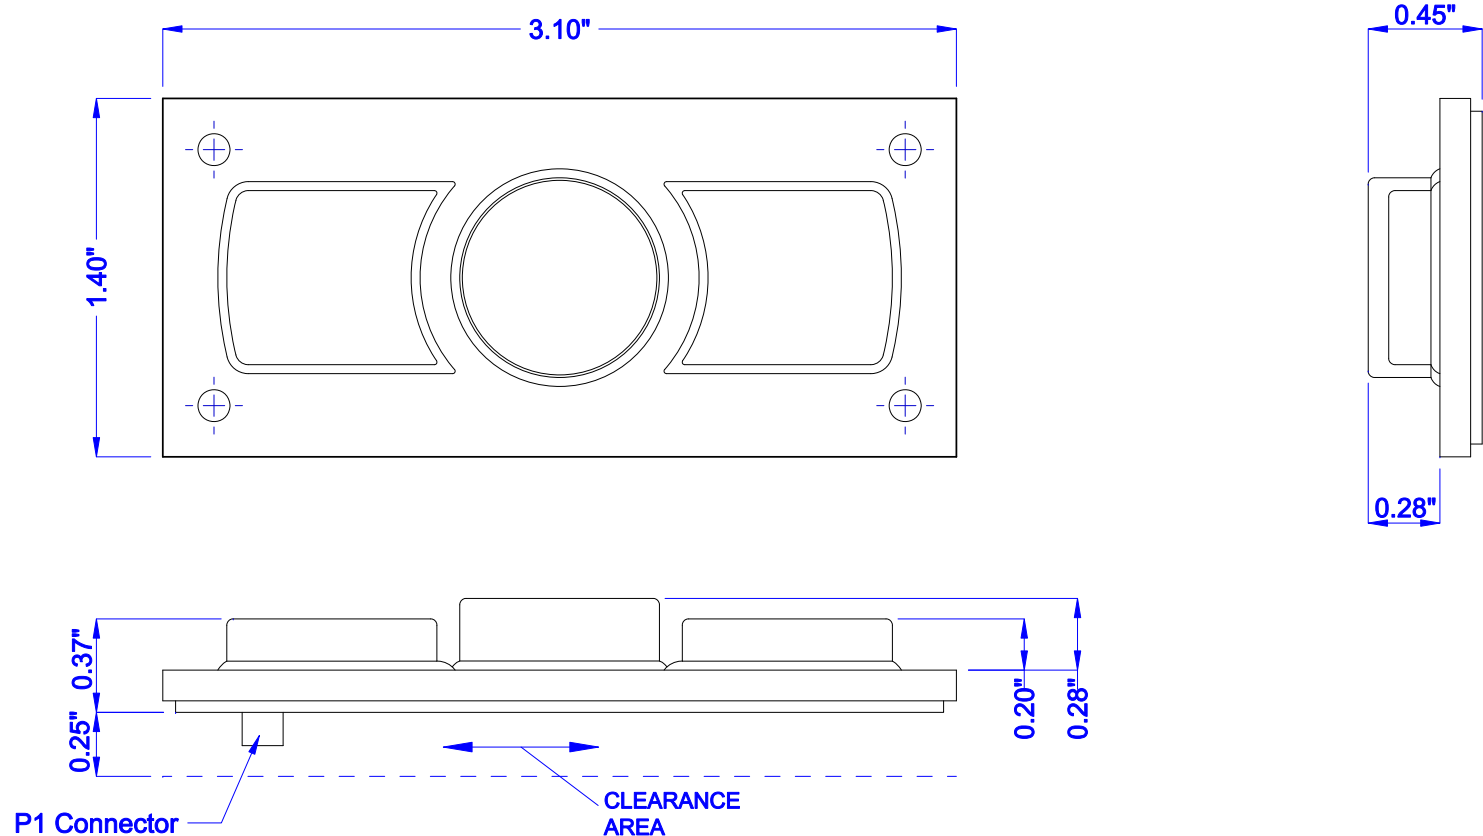

KEY SWITCH

MATERIAL: Industrial Silicone Rubber
 LIFE: Greater Than 10 Million Cycles
 TRAVEL: 0.055 in.
 ACTUATION FORCE: 6.35 oz. +/- 1.06oz (180g +/- 30g)
 FEEDBACK: Tactile with Mechanical Snap

TEMPERATURE RANGE

STORAGE: -40°F to +194°F (-40°C to +90°C)
 OPERATING: -40°F to +158°F (-40°C to +70°C)

VIBRATION

POWER SPECTRAL DENSITY: .04g/HZ
 FREQUENCY RANGE: 20Hz-2Khz
 DURATION OF TEST PER AXIS: 3 hours

POWER

PS2: 35mA@5V (from Mouse port)
 USB: 35mA@5V (from CPU port)

HUMIDITY

100% Humidity Resistant

SHOCK

3 X 11 ms pulses of 50g on each of 3 axis


WEIGHT

0.25 lbs +/- 0.10 lbs (0.11 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:0.75

HP-1330 MOUNTING

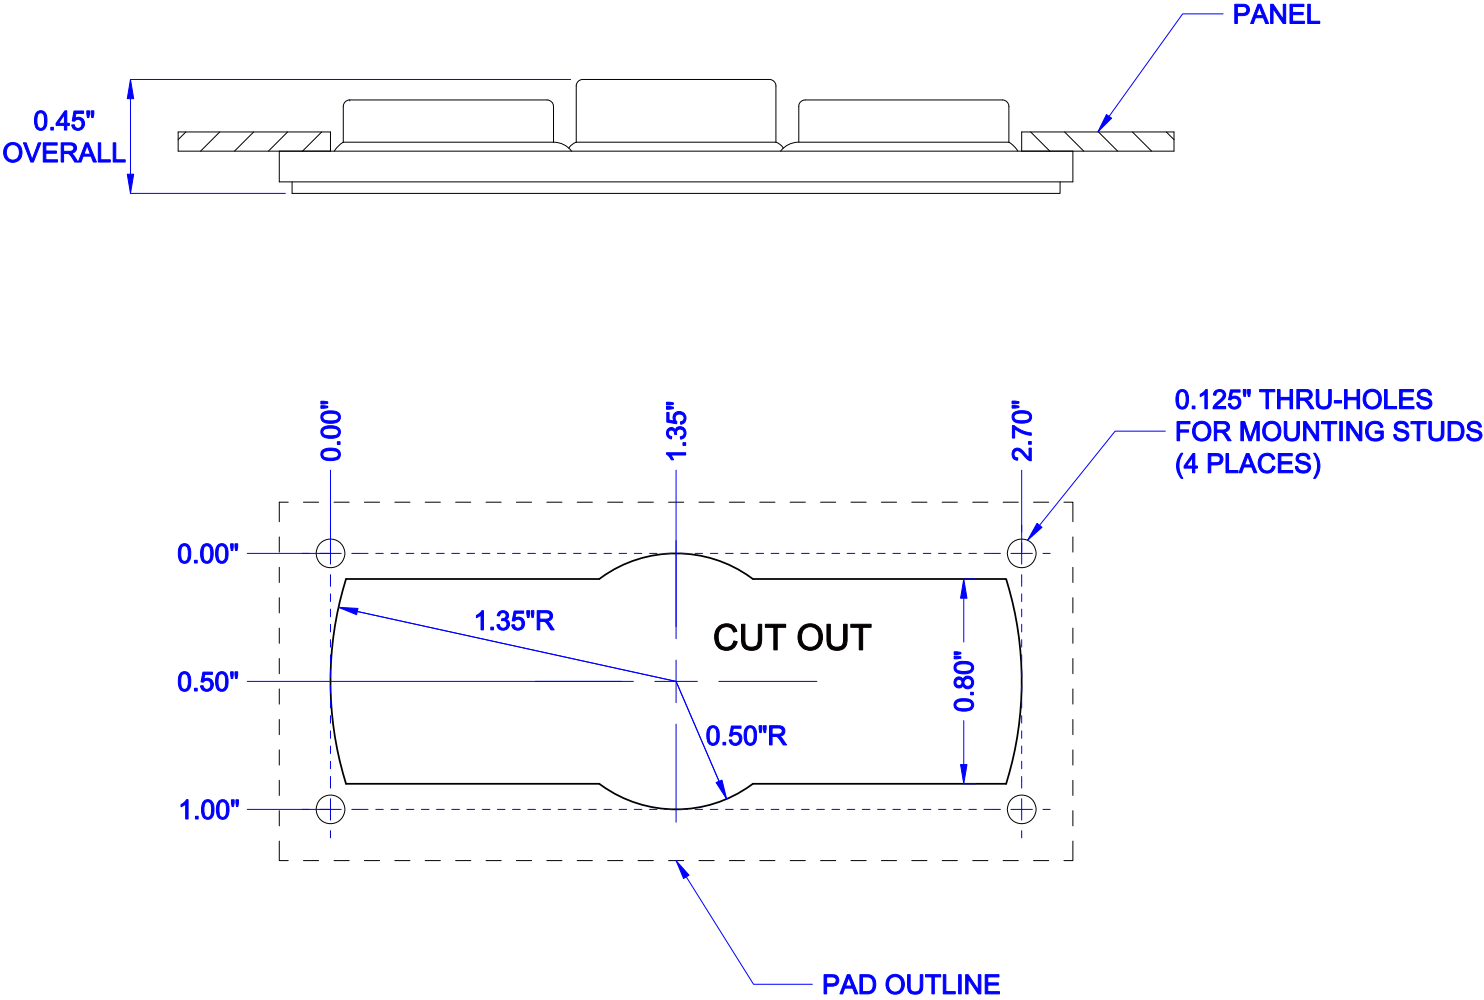

 iKey , Ltd. 2621 Ridgpoint Dr. Suite 235 Austin, Texas 78754 Voice: (512) 897-0283 Fax: (512) 927-8530	©2008 iKey, Ltd.	Part Number: HP-1330	Drawing Number: MKT0142	Sheet: 2 OF 2	
		Drawing Title: HP-1330-MKT	Revision: 1.00	Date: 09.09.08	JWB