



# HP-FSR-OEM-MKT

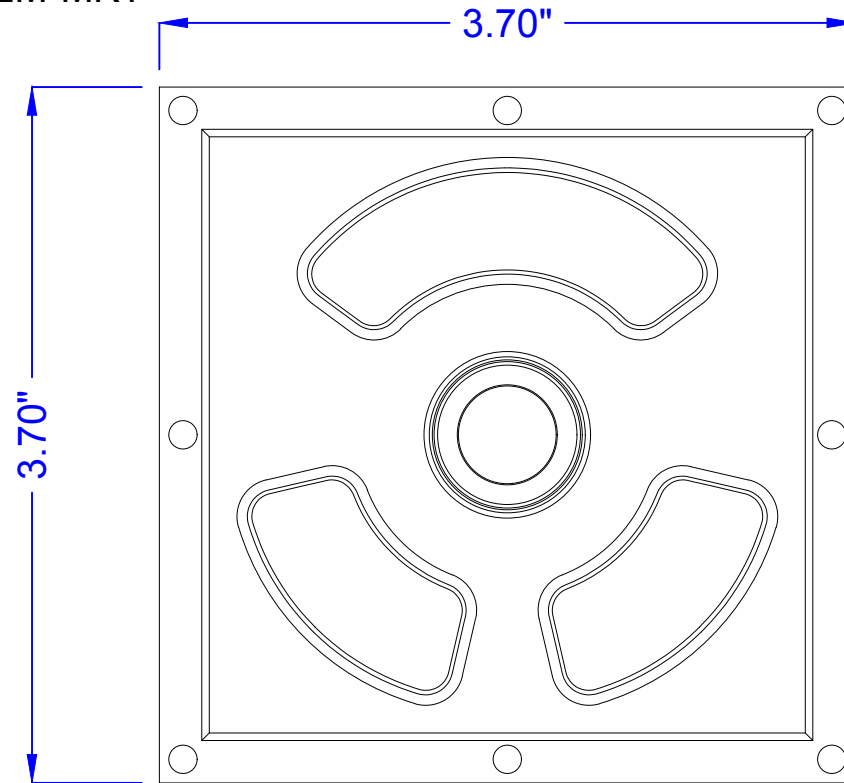

DATE	CHANGES	INTL	REV
12.03.13	Original	TH	1.0
01.20.16	Updated Temperature Rating	AH	1.1



## KEY SWITCH

MATERIAL: Industrial Silicone Rubber  
 LIFE: Greater Than 10 Million Cycles  
 TRAVEL: 0.055 in.  
 ACTUATION FORCE: 7.05 oz. +/- 1.06oz (200g +/- 30g)  
 FEEDBACK: Tactile with Mechanical Snap

## TEMPERATURE RANGE

STORAGE: -40°F to +167°F (-40°C to +75°C)  
 OPERATING: -40°F to +158°F (-40°C to +70°C)

## VIBRATION

POWER SPECTRAL DENSITY: .04g/HZ  
 FREQUENCY RANGE: 20Hz-2Khz  
 DURATION OF TEST PER AXIS: 3 hours

## POWER

5V@10ma (from mouse connection port)

## HUMIDITY

100% Humidity Resistant

## SHOCK

3 X 11 ms pulses of 50g on each of 3 axis

## WEIGHT

1.25 lbs +/- 0.10 lbs (0.68 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:1.5



iKey, Ltd.  
 2621 Ridgepoint Dr. Suite 235  
 Austin, Texas 78754  
 Voice: (512) 837-0283  
 Fax: (512) 927-8530

Part Number: HP-FSR-OEM-MKT

Drawing Title: HP-FSR-OEM-MKT

Drawing Number: MKT0368

Revision: 1.1

Sheet: 1 OF 1

Date: 01.20.16

ALH