


SK-102-461

| DATE | CHANGES | INTL | REV |
|----------|----------|------|------|
| 12.16.11 | Original | TH | 1.00 |
| | | | |

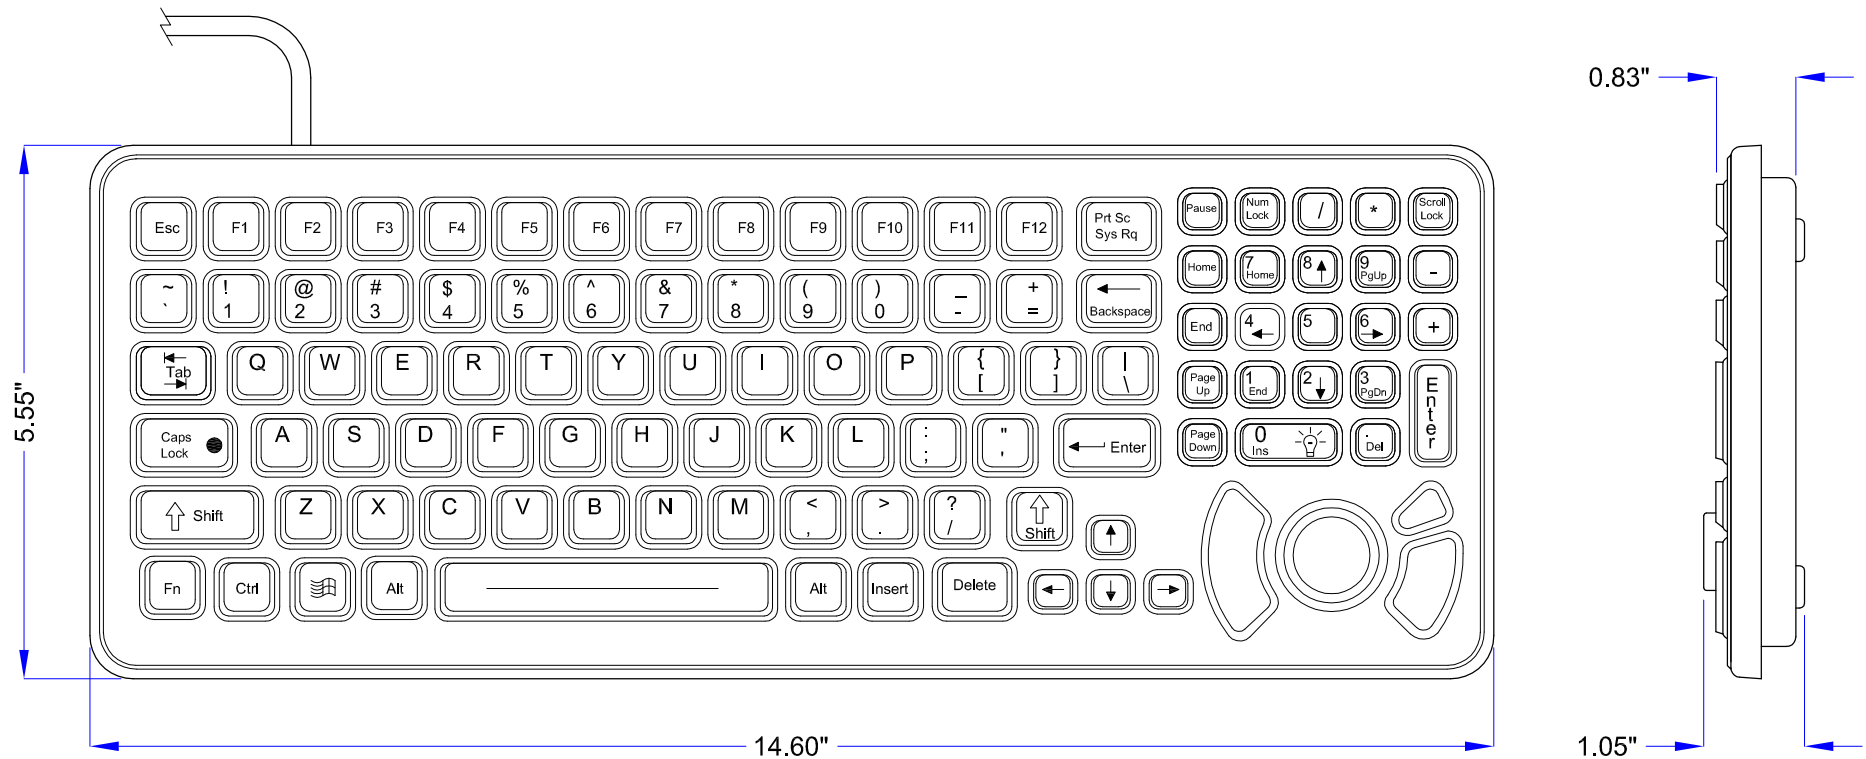

KEY SWITCH

MATERIAL: Industrial Silicone Rubber
LIFE: Greater Than 10 Million Cycles
TRAVEL: 0.055 in.
ACTUATION FORCE: 7.05 oz. +/- 1.06oz (200g +/- 30g)
FEEDBACK: Tactile with Mechanical Snap

TEMPERATURE RANGE

STORAGE: -40°F to +194°F (-40°C to +90°C)
OPERATING: -40°F to +158°F (-40°C to +70°C)

VIBRATION

POWER SPECTRAL DENSITY: .04g/HZ
FREQUENCY RANGE: 20Hz-2Khz
DURATION OF TEST PER AXIS: 3 hours

POWER

PS2: KEYBOARD: 50mA@5V (from Keyboard port)
POINTER: 35mA@5V (from Mouse port)
USB: 85mA@5V (from CPU port)

HUMIDITY

100% Humidity Resistant

SHOCK

3 X 11 ms pulses of 50g on each of 3 axis

WEIGHT

1.50 lbs +/- 0.10 lbs (0.68 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2



iKey, Ltd.
2621 Ridgpoint Dr, Suite 235
Austin, Texas 78754
Voice: (512) 837-0283
Fax: (512) 927-8530

©2011 iKey, Ltd.

Part Number: SK-102-461

Drawing Title: SK-102-461-MKT

Drawing Number: MKT0299

Revision: 1.0

Sheet: 1 OF 1

Date: 12.16.11

TWH