



SL-88-461-OEM

DATE	CHANGES	INTL	REV
06.16.08	Original	JB	1.0
01.08.10	Updated drawing format	JB	2.0

NOTES:

1. UNIT IS MOUNTED USING RTV ADHESIVE AND #4-40 MOUNTING SCREWS (18 PLACES)
2. TALLEST COMPONENT EXTENDS 0.250 " INCHES BELOW KEYPAD

Detail A
(All Around)

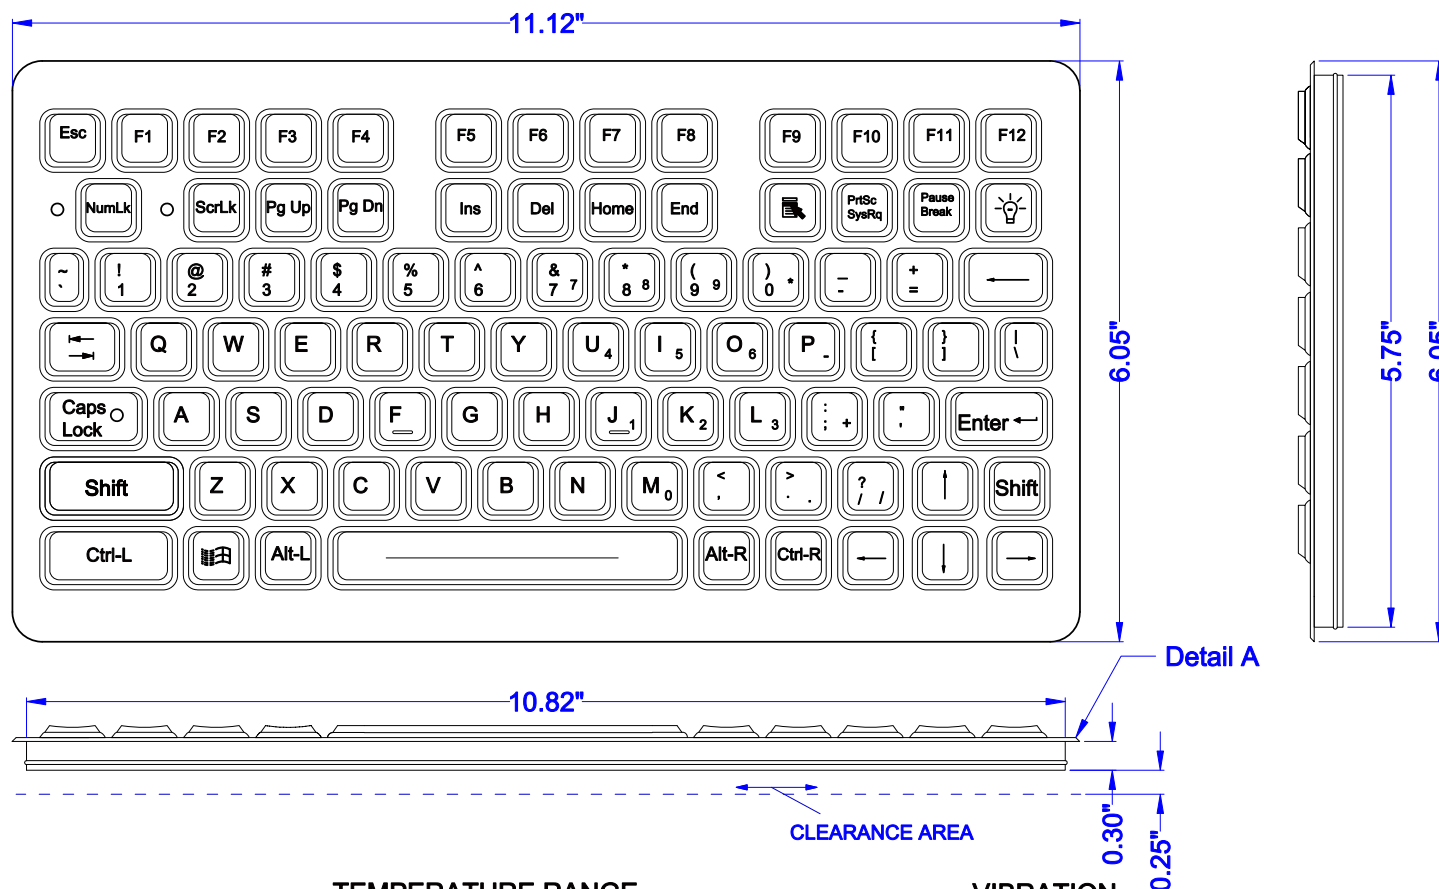

KEY SWITCH

MATERIAL: Industrial Silicone Rubber
LIFE: Greater Than 10 Million Cycles
TRAVEL: 0.055 in.
ACTUATION FORCE: 7.05 oz. +/- 1.06oz (200g +/- 30g)
FEEDBACK: Tactile with Mechanical Snap

POWER

PS2: 200mA@5V (from Keyboard port)
USB: 200mA@5V (from USB port)

TEMPERATURE RANGE

STORAGE: -40°F to +194°F (-40°C to +90°C)
OPERATING: -40°F to +158°F (-40°C to +70°C)

HUMIDITY

100% Humidity Resistant

VIBRATION

POWER SPECTRAL DENSITY: .04g²/HZ
FREQUENCY RANGE: 20Hz-2KHz
DURATION OF TEST PER AXIS: 3 hours

SHOCK

3 X 11 ms pulses of 50g on each of 3 axis

WEIGHT

1.00 lbs +/- 0.10 lbs (0.45 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2



iKey, Ltd.
2621 Ridgpoint Dr. Suite 235
Austin, Texas 78754

©2008 iKey, Ltd.

Voice: (512) 937-0283
Fax: (512) 927-8630

Part Number: SL-88-461-OEM

Drawing Title: SL-88-461-OEM

Drawing Number: MKT0107


Revision: 2.0

Sheet: 1 OF 3

Date: 01.08.10

JWB

SL-88-461-OEM

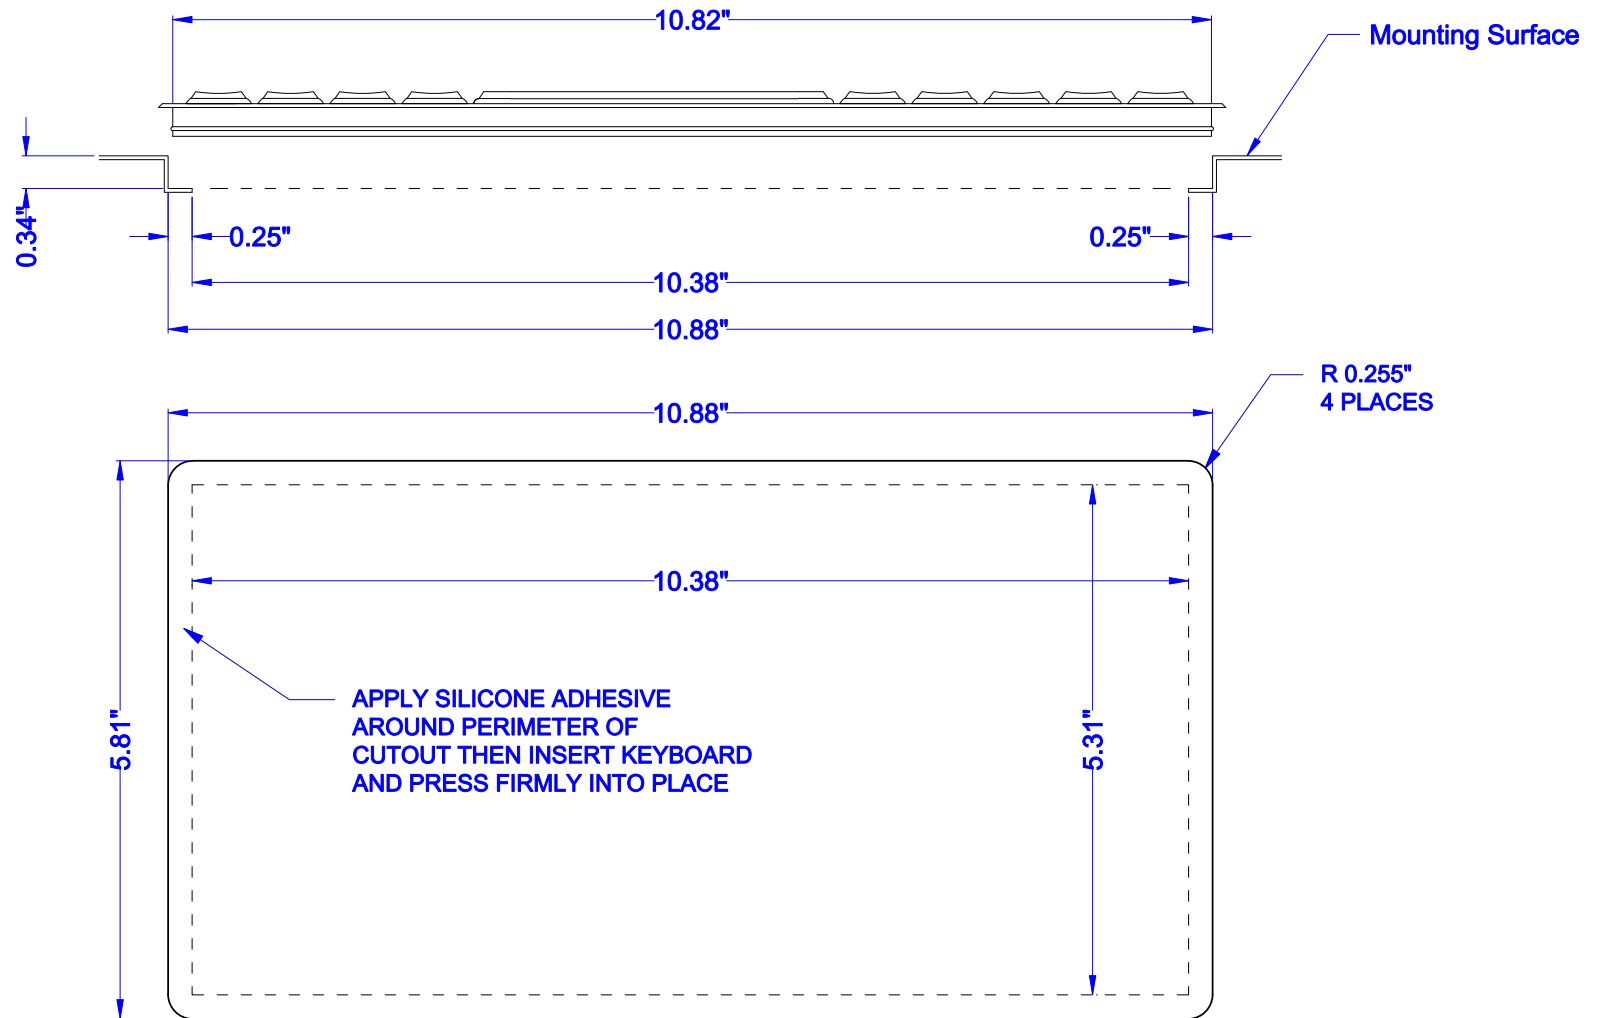

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2



iKey, Ltd.
2621 Ridgpoint Dr. Suite 235
Austin, Texas 78754

©2008 iKey, Ltd.

Voice: (512) 837-0283
Fax: (512) 927-8530

Part Number: SL-88-461-OEM

Drawing Title: SL-88-461-OEM

Drawing Number: MKT0107

Revision: 2.0


Sheet: 2 OF 3

Date: 01.08.10

JWB

SL-88-461-OEM (BOTTOM SIDE)

COMPONENT SIDE

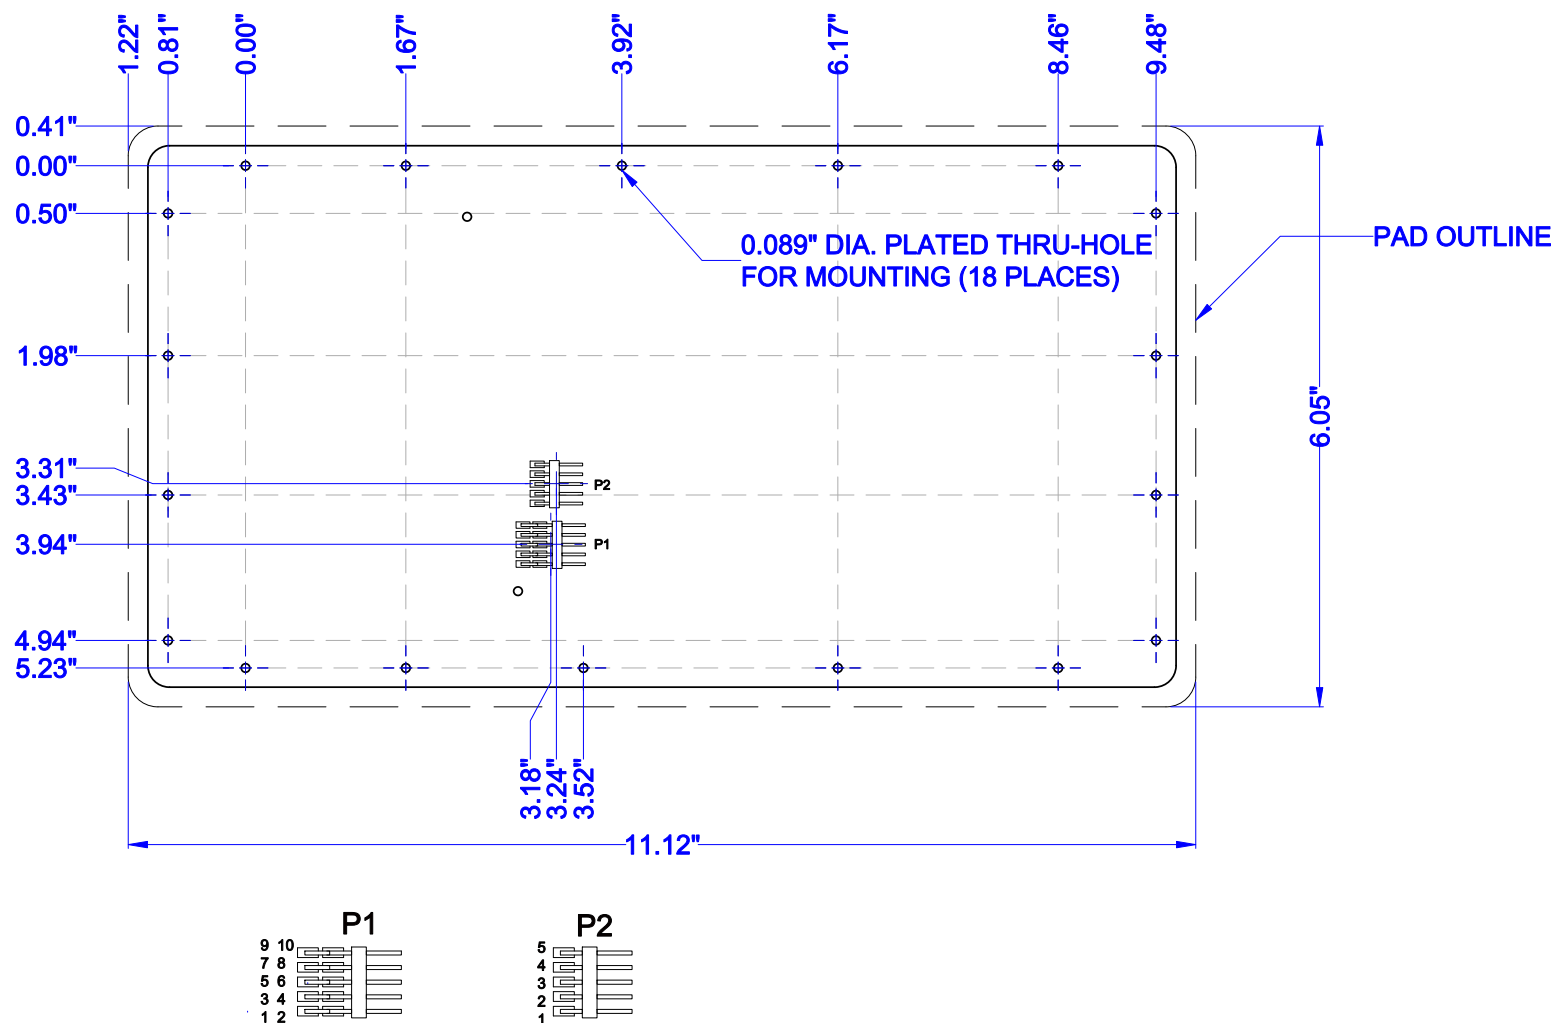

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2



iKey, Ltd.
2621 Ridgpoint Dr. Suite 235
Austin, Texas 78754

©2008 iKey, Ltd.

Voice: (512) 837-0283
Fax: (512) 927-8530

Part Number: SL-88-461-OEM

Drawing Title: SL-88-461-OEM

Drawing Number: MKT0107

Revision: 2.0

Sheet: 3 OF 3

Date: 01.08.10

JWB