


SLK-102-M

DATE	CHANGES	INTL	REV
10.02.03	Original		1.00
09.10.08	Updated Format	JB	1.00

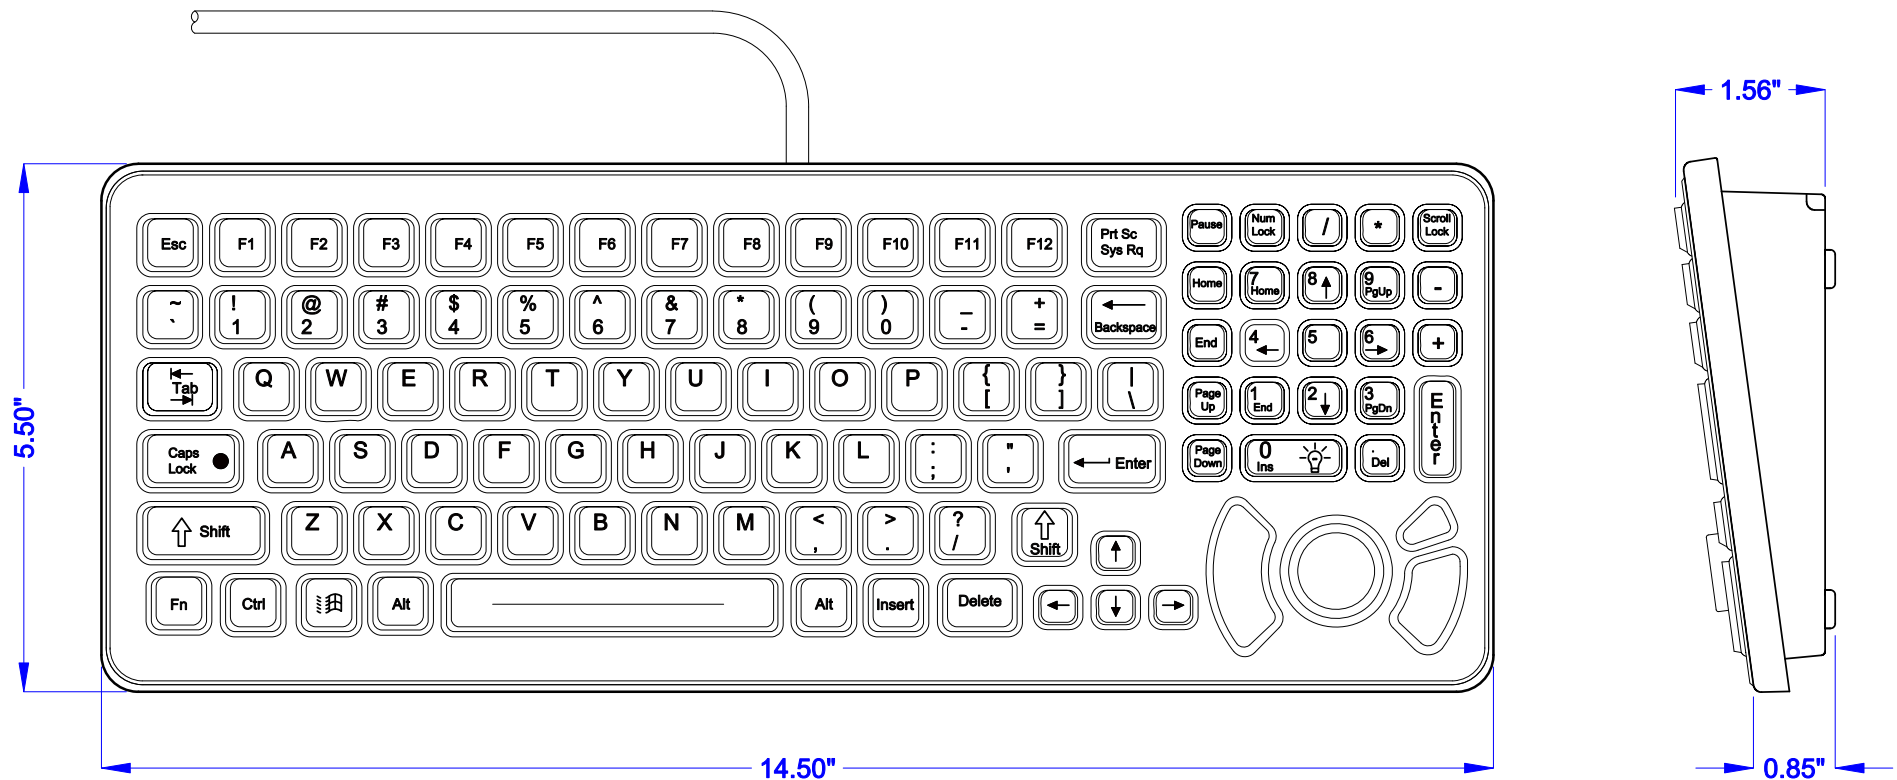

KEY SWITCH

MATERIAL: Industrial Silicone Rubber
LIFE: Greater Than 10 Million Cycles
TRAVEL: 0.055 in.
ACTUATION FORCE: 7.05 oz. +/- 1.06oz (200g +/- 30g)
FEEDBACK: Tactile with Mechanical Snap

TEMPERATURE RANGE

STORAGE: -40°F to +194°F (-40°C to +90°C)
OPERATING: -40°F to +158°F (-40°C to +70°C)

VIBRATION

POWER SPECTRAL DENSITY: .04g/HZ
FREQUENCY RANGE: 20Hz-2Khz
DURATION OF TEST PER AXIS: 3 hours

POWER

PS2:
KEYBOARD: 210mA@5V (from Keyboard port)
POINTER: 35mA@5V (from Mouse port)
USB: 245mA@5V (from CPU port)

HUMIDITY

100% Humidity Resistant

SHOCK

3 X 11 ms pulses of 50g on each of 3 axis

WEIGHT

2.00 lbs +/- 0.10 lbs (0.91 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2



iKey, Ltd.
 2621 Ridgpoint Dr. Suite 235
 Austin, Texas 78754

©2006 iKey, Ltd.
 Voice: (512) 837-0283
 Fax: (512) 927-8530

Part Number: SLK-102-M

Drawing Title: SLK-102-M-MKT

Drawing Number: MKT0002


Revision: 1.00

Sheet: 1 OF 2

Date: 09.10.08

JWB


SLK-102-M BACK/MOUNTING

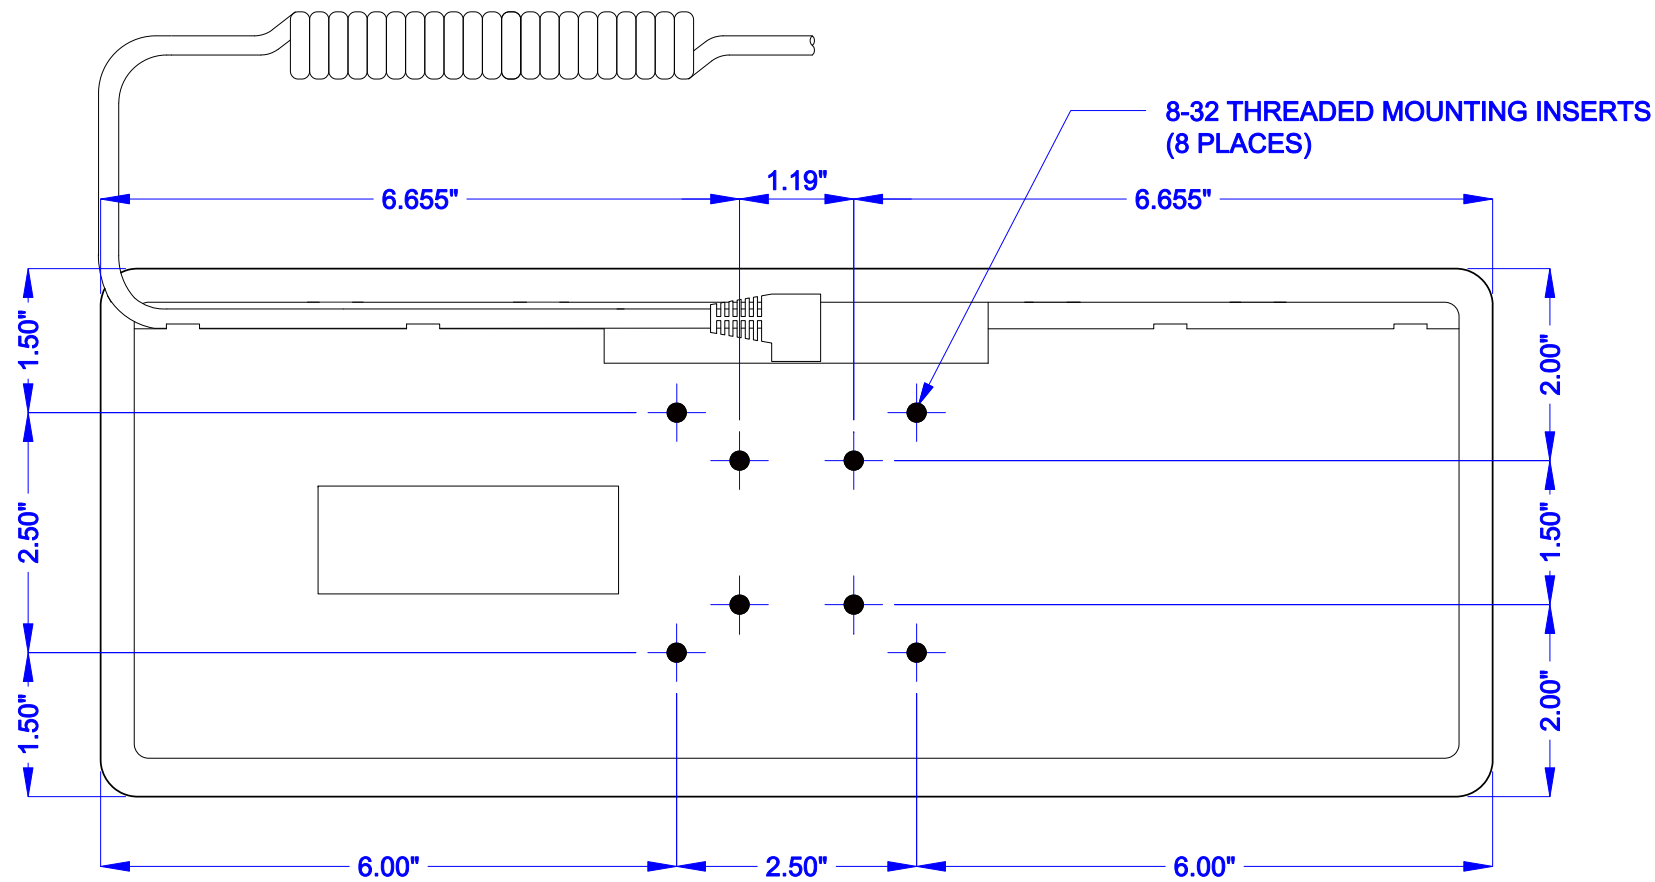

ENCLOSURE CASE: ABS/Polycarbonate

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2

 iKey , Ltd. 2621 Ridgpoint Dr. Suite 235 Austin, Texas 78754 Voice: (512) 897-0283 Fax: (512) 927-8530	©2008 iKey, Ltd.	Part Number: SLK-102-M	Drawing Number: MKT0002	Sheet: 2 OF 2	
		Drawing Title: SLK-102-M-MKT	Revision: 1.00	Date: 09.10.08	JWB