


SLK-102-TP-M

DATE	CHANGES	INTL	REV
03.04.05	Original		1.00
07.15.08	Updated Format	JB	1.01

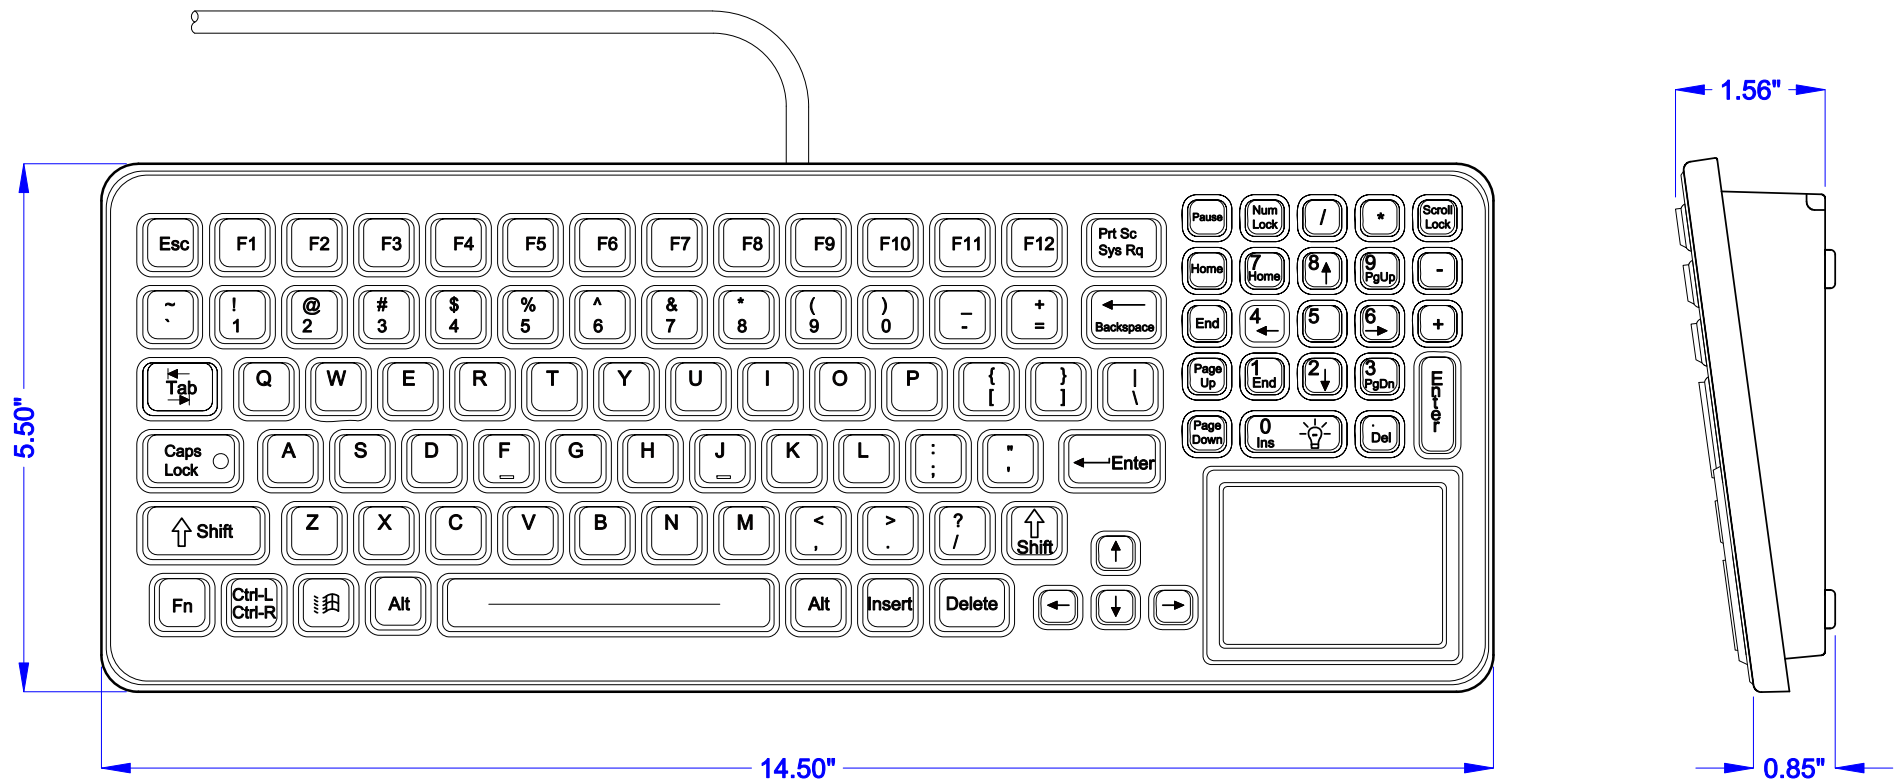

KEY SWITCH

MATERIAL: Industrial Silicone Rubber
LIFE: Greater Than 10 Million Cycles
TRAVEL: 0.055 in.
ACTUATION FORCE: 7.05 oz. +/- 1.06oz (200g +/- 30g)
FEEDBACK: Tactile with Mechanical Snap

TEMPERATURE RANGE

STORAGE: -40°F to +149°F (-40°C to +65°C)
OPERATING: 32°F to +140°F (0°C to +60°C)

VIBRATION

POWER SPECTRAL DENSITY: .04g/HZ
FREQUENCY RANGE: 20Hz-2Khz
DURATION OF TEST PER AXIS: 3 hours

POWER

PS2: KEYBOARD: 200mA@5V (from Keyboard port)
TOUCH PAD: 10mA@5V (from Mouse port)
USB: 210mA@5V (from CPU port)

HUMIDITY

100% Humidity Resistant

SHOCK

3 X 11 ms pulses of 50g on each of 3 axis

WEIGHT

2.00 lbs +/- 0.10 lbs (0.91 kg +/- 0.05 kg)

PROPRIETARY / CONFIDENTIAL

SCALE: 1:2



iKey, Ltd.
 2621 Ridgpoint Dr. Suite 235
 Austin, Texas 78754

©2006 iKey, Ltd.
 Voice: (512) 897-0283
 Fax: (512) 927-8530

Part Number: SLK-102-TP-M

Drawing Title: SLK-102-TP-M-MKT

Drawing Number: MKT0046


Revision: 1.01

Sheet: 1 OF 2

Date: 07.15.08

JWB


SLK-102-TP-M BACK/MOUNTING

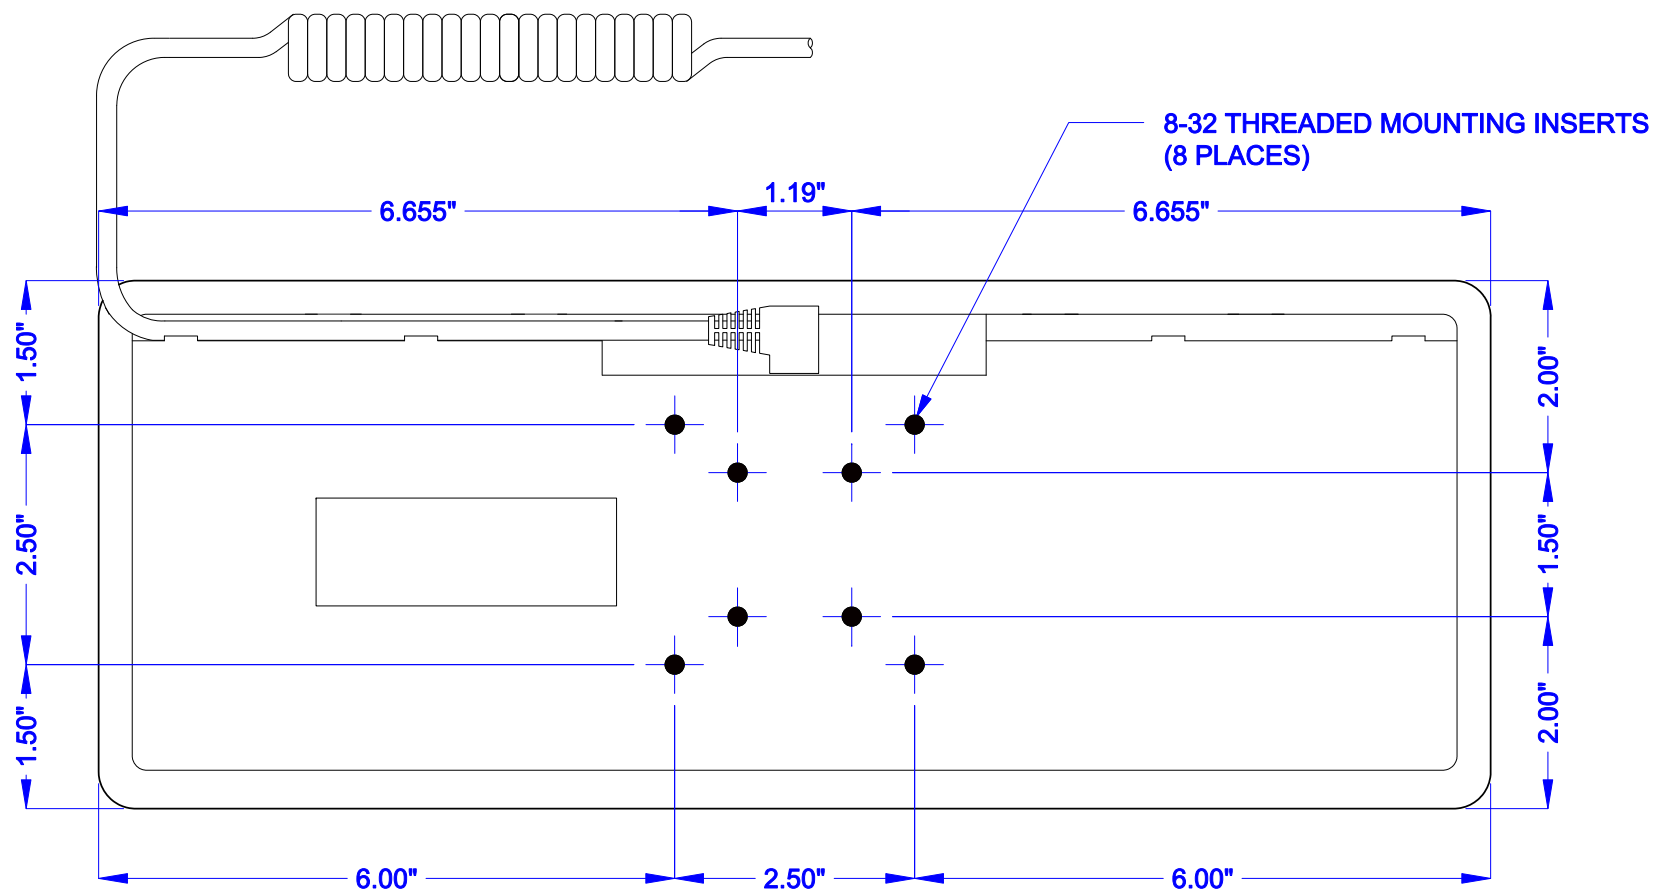

ENCLOSURE CASE: ABS/Polycarbonate

PROPRIETARY / CONFIDENTIAL

SCALE: 1:2

 iKey , Ltd. 2621 Ridgpoint Dr. Suite 235 Austin, Texas 78754 Voice: (512) 897-0283 Fax: (512) 927-8530	©2006 iKey, Ltd.	Part Number: SLK-102-TP-M	Drawing Number: MKT0046	Sheet: 2 OF 2	
		Drawing Title: SLK-102-TP-M-MKT	Revision: 1.01	Date: 07.15.08	JWB