


TMLT-890-OEM

DATE	CHANGES	INTL	REV
08.04.10	Original	JMW	1.0
08.17.10	Added Dimensions to sheet 2	JMW	1.1
09.17.10	Added Notes to sheet 2	JMW	1.2

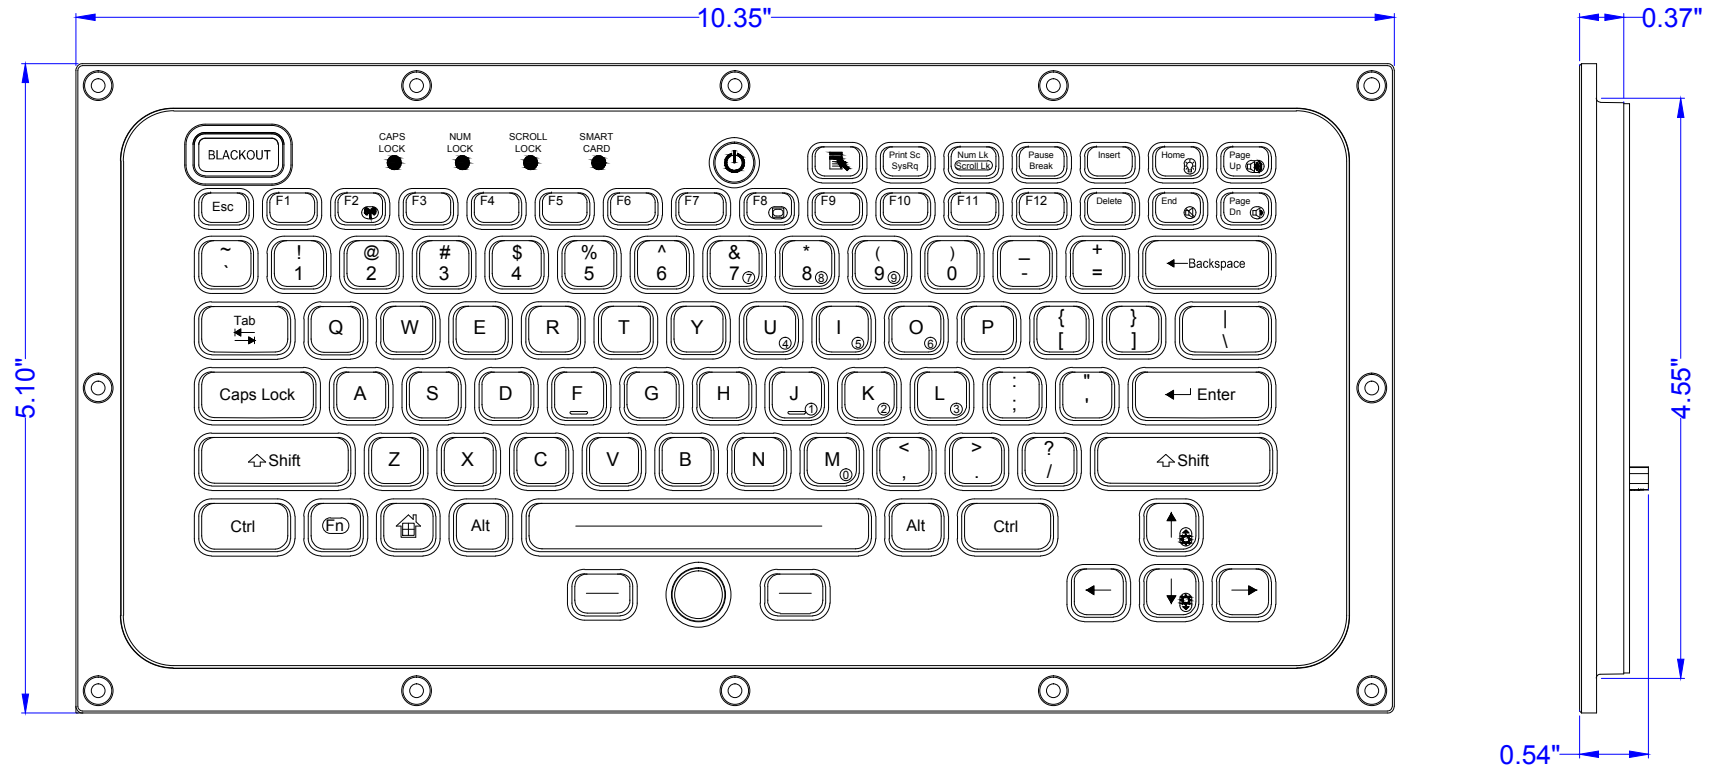

KEY SWITCH

MATERIAL: Industrial Silicone Rubber
 LIFE: Greater Than 10 Million Cycles
 TRAVEL: 0.055 in.
 ACTUATION FORCE: 8.11 oz. +/- 1.06oz(230g +/- 20g)
 FEEDBACK: Tactile with Mechanical Snap

POWER

250mA@5V
 KEYBOARD/BACKLIGHT
 PS2/POINTER

TEMPERATURE RANGE

STORAGE: -59.8°F to +159.8°F (-51°C to +71°C)
 OPERATING: -25.6°F to +140°F (-32°C to +60°C)

HUMIDITY

100% Humidity Resistant

VIBRATION

POWER SPECTRAL DENSITY: .04g²/HZ
 FREQUENCY RANGE: 20Hz-2Khz
 DURATION OF TEST PER AXIS: 3 hours

SHOCK

3 X 11 ms pulses of 50g on each of 3 axis

WEIGHT

0.75 lbs +/- 0.10 lbs (0.34 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:1.5



iKey, Ltd.
 2621 Ridgpoint Dr. Suite 235
 Austin, Texas 78754

©2010 iKey, Ltd.

Voice: (512) 837-0283
 Fax: (512) 927-8530

Part Number: TMLT-890-OEM

Drawing Title: TMLT-890-OEM-MKT

Drawing Number: MKT0235


Revision: 1.2

Sheet: 1 OF 2

Date: 09.17.10

JMW

TMLT-890-OEM MOUNTING (TOP VIEW)

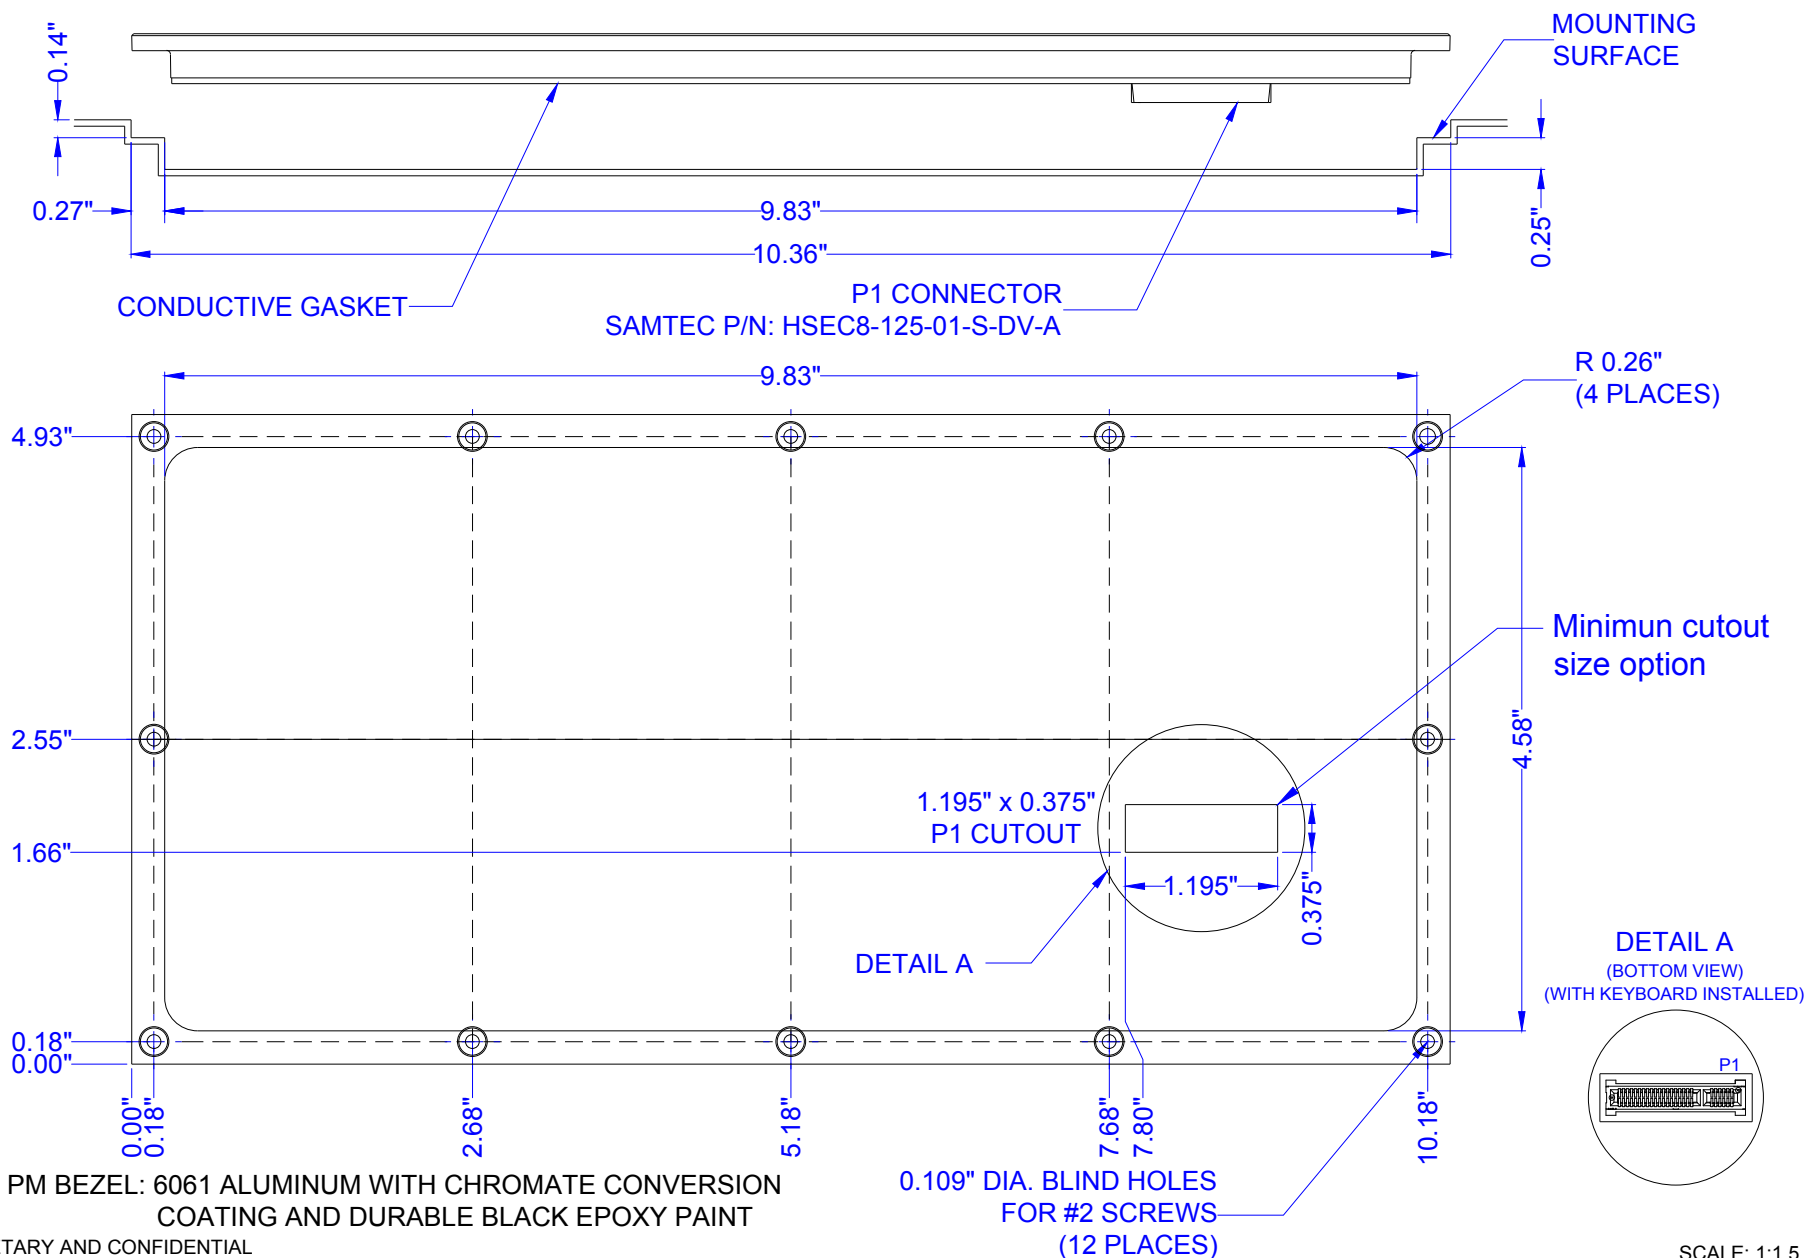

iKey, Ltd.
2621 Ridgpoint Dr. Suite 235
Austin, Texas 78754

©2010 iKey, Ltd.
Voice: (512) 837-0283
Fax: (512) 927-8530

Part Number: TMLT-890-OEM

Drawing Title: TMLT-890-OEM-MKT

Drawing Number: MKT0235

Revision: 1.2

Sheet: 2 OF 2

Date: 09.17.10

JMW